

COMMERCIAL WINDSTORM MITIGATION INSPECTION REPORT (OIR-B1-1802)

Prepared for:

Banana Bay Condominium

200 Banana River Blvd S, Building 2400, Units 2401-2424 Cocoa Beach, FL 32931

As of 5/20/2022



RECAPITULATION OF MITIGATION FEATURES For 200 Banana River Blvd S, Building 2400, Units 2401-2424

1. <u>Building Code:</u> Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1983 per Brevard County

Property Appraiser.

2. Roof Covering: FBC Equivalent

Comments: The roof covering was replaced in 2016. See attached Roofing

Proposal information provided by the association. This roof was verified as meeting the building code requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: Level B

Comments: Inspection verified 1/2" plywood roof deck attached with 8d nails at

a minimum of 6" on the edge & 12" in the field.

4. Roof to Wall Single Wraps

Attachment:

Comments: Single wraps were verified during our attic inspection as the roof

wall connection. Each single wrap has a minimum of two nails on the

front of the truss and one nail on the opposite side.

5. Roof Geometry: Flat Roof

Comments: Inspection verified flat roof shape, refer to attached photographs.

6. SWR: No

Comments: At the time of inspection, no SWR was verified.

7. **Opening Protection:** None or Some Glazed Openings

Comments: No opening protection verified at the time of inspection.

Address Verification



Exterior Elevation



Roof Construction



Roof Construction



Roof Construction



Roof Construction



SUPPORTING DOCUMENTION OF WINDSTORM MITIGATION FEATURES LOCATED AT: 200 Banana River Blvd S, Building 2400, Units 2401-2424

FPAT File #MIT2217243

Roof Construction





Cell Phone: (321) 794-0577

Email: bananabay@cfl.rr.com

Owner: Banana Bay Condominiums

Property Management: Reconcilable Differences C/O Ted BBC HOA President: Barbara Peterson

Address: 200 S Banana River Blvd

State: FL Zip: 32931 City: Cocoa Beach Job Address: 200 S Banana River Blvd, Cocoa Beach, FL 32931

Job Description

- 1. Provide at cost all necessary permits and inspections required by code.
 2. Tear off existing material for clean working surface and dispose of material debris properly.
 3. Remove and replace damaged or weakened wood at prices specified below.
 4. Re-nail phywood deck to meet new building wind and hurricane uplift codes.
 5. Supply and install underlayment according to manufacturers specifications and according to code.
 6. Supply and install all fascia, flashings, and trim according to manufacturers specifications and according to code.
 7. Supply and install all fascia, flashings, and trim according to manufacturers specifications and according to code.
 8. Paint penetration vents to blend with roof color.
 9. Walk properly before and after with authorized person to determine condition of property, define the job description, and review the work performed.

Job S	pecific Description: For Banana Bay Condominiums	
Item	Description	Price
10.	2300 Building - Tear off and re-roof with	\$62,431
	Gerard Stone Coated Steel Battenless - sloped roof	
	Certainteed self adhesive base, granulated cap sheet modified bitumen - flat roo	of .
11.	2400 Building - Tear off and re-roof with	\$62,431
	Gerard Stone Coated Steel Battenless – sloped roof	
	Certainteed self adhesive base, granulated cap sheet modified bitumen - flat roo	of
12.	Garages - West - Tear off and re-roof with	\$26,000
	Certainteed self adhesive base, granulated cap sheet modified bitumen	
13.	Elevator Area- Ground Floor	\$ 3,250
14.	Extra Trash and Debris	\$ 1,278
15.	Hurricane Debris Clean-up	\$ 5,320
16.	Termination Bars (Flat Roof)	\$ 4,658
17.	Plywood	\$21,683
18	2x4x8 Lumber	\$ 634
19.	A/C Stands and Hoods	\$34,220
20.	Insulation Removal	\$18,336
21.	Insulation Install	\$65,322
22.	Mansard Tile	\$61,802
23.	Coping	\$10,560
Tota	I Contract Price	377,925
24.	Stucco Wall Repair - To be added by Change Order #1	TBD
25.	Gutters - To be added by Change Order #1	TBD


Page 1 of 3

Roof Construction

SUPPORTING DOCUMENTION OF WINDSTORM MITIGATION FEATURES LOCATED AT: 200 Banana River Blvd S, Building 2400, Units 2401-2424

FPAT File #MIT2217243

Roof Construction

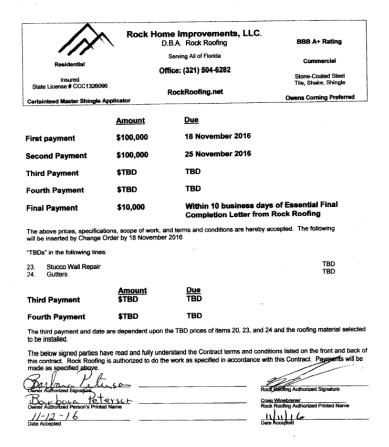

Page 2 of 3

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 5/20/2022	•						
Owner Information							
Owner Name: Banana Bay Condominium	Contact Person: Jennifer Vo						
Address: 200 Banana River Blvd S, Buildir	Home Phone:						
City: Cocoa Beach	Zip: 32931	Work Phone: (321) 735-7624					
County: Brevard		Cell Phone:					
Insurance Company:		Policy #:					
Year of Home: 1983	# of Stories: 4	Email:					

Tear of frome: 1905	" of Stories.	•	Ziliuli.		
NOTE: Any documentation used ir accompany this form. At least one though 7. The insurer may ask add	photograph must ac	company this form	to validate each attribute m	narked in questions 3	t
 Building Code: Was the structure the HVHZ (Miami-Dade or Browa I) A. Built in compliance with the FB 3/1/2002: Building Permit Ap B. For the HVHZ Only: Built in comprovide a permit application w [X] C. Unknown or does not meet the 	ard counties), South F BC: Year Built . For laplication Date (MM/DD/2) ompliance with the SF with a date after 9/1/19 e requirements of Ans	Clorida Building Cod homes built in 2002/ (YYY) BC-94: Year Built _ 1994: Building Permi wer "A" or "B"	le (SFBC-94)? 2003 provide a permit application. For homes built in 1 t Application Date (MM/DD/YYYY)	994, 1995, and 1996	
 Roof Covering: Select all roof co OR Year of Original Installation/F covering identified. 					
2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	Provided for Compliance	
[] 1. Asphalt/Fiberglass Shingle [] 2. Concrete/Clay Tile [X] 3. Metal [] 4. Built Up [X] 5. Membrane [] 6. Other			2016	0 0 0 0 0	
 B. All roof coverings have a Miam permit application after 9/1/1 C. One or more roof coverings do D. No roof coverings meet the req Roof Deck Attachment: What is 	ng permit application of ni-Dade Product Appr 1994 and before 3/1/20 not meet the requirent uirements of Answer the weakest form of re-	date on or after 3/1/0 roval listing current a 002 OR the roof is onents of Answer "A" or "B".	O2 OR the roof is original and at time of installation OR (for original and built in 1997 or late or "B".	built in 2004 or later. the HVHZ only) a rooter.	
installation OR have a roofin [] B. All roof coverings have a Mian permit application after 9/1/1 [] C. One or more roof coverings do [] D. No roof coverings meet the req	ng permit application on i-Dade Product Appr 1994 and before 3/1/20 not meet the requirent uirements of Answer the <u>weakest</u> form of red (OSB) roof sheathing	date on or after 3/1/0 roval listing current a 002 OR the roof is onents of Answer "A" or "B". roof deck attachment of attached to the roof attached to the roof deck attached.	O2 OR the roof is original and at time of installation OR (for original and built in 1997 or late or "B". t? of truss/rafter (spaced a maximum of truss/rafter (spaced a maximum).	built in 2004 or la the HVHZ only) a tter.	a roo s o.c

- staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- [X] B. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field.-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- [] C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR-Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

	A										
Inspectors Initials	0'	Property	Address	200 Banana	a River Blvd S	S, Building	g 2400,	Units 2	401-2424,	Cocoa	Beach

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

182 psf.	
[] D. Reinforced Concre	te Roof Deck.
[] E. Other:	
[] F. Unknown or unider	ntified.
[] G. No attic access.	
	ment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within outside corner of the roof in determination of WEAKEST type)
[] Truss	s/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the e of the wall, or
[] Meta	l connectors that do not meet the minimal conditions or requirements of B, C, or D
Minimal conditions t	o qualify for categories B, C, or D. All visible metal connectors are:
	ured to truss/rafter with a minimum of three (3) nails, and
[X]Atta	sched to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
B. Clips	
[] Meta	l connectors that do not wrap over the top of the truss/rafter, or l connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail a requirements of C or D, but is secured with a minimum of 3 nails.
[X] C. Single Wraps	
	etal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a
	nimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
D. Double Wraps	
beam, o minimu	l Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a sum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or
both sic	l connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on les, and is secured to the top plate with a minimum of three nails on each side.
	polts structurally connected or reinforced concrete roof.
[] F. Other: [] G. Unknown or unide	ntified
[] H. No attic access	
	at is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:
[X] B. Flat Roof	Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12: sq ft; Total roof area: sq ft
[] C. Other Roof	Any roof that does not qualify as either (A) or (B) above.
[] A. SWR (also called S sheathing or foat	esistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the m adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling sion in the event of roof covering loss.
[] C. Unknown or undet	ermined.

or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least

Inspectors Initials Property Address 200 Banana River Blvd S, Building 2400, Units 2401-2424, Cocoa Beach

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

	ening Protection Level Chart		Glazed O	penings		_	Glazed enings
openi form	an "X" in each row to identify all forms of protection in use for each ng type. Check only one answer below (A thru X), based on the weakest of protection (lowest row) for any of the Glazed openings and indicate eakest form of protection (lowest row) for Non-Glazed openings.	Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	Х	Х		Χ
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
	Opening Protection products that appear to be A or B but are not verified						
N	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	Χ				Χ	

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

☐ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115
- □ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
 □ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- [] B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 - ASTM E 1886 and ASTM E 1996 (Large Missile 4.5 lb.)
 - SSTD 12 (Large Missile 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile 2 to 4.5 lb.)
 - □ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
 □ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
 - ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
- [] <u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
 - ☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
 - ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
 - ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 200 Banana River Blvd S, Building 2400, Units 2401-2424, Cocoa Beach

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MIT221724	: 4	'//	411	. /	· /	ш	/	N	#	ρ	нπ	-	VI	PΑ	нΙ	ı
----------------------	-----	-----	-----	-----	-----	---	---	---	---	---	----	---	----	----	----	---

protective coverings not meeting the requirements of "B" with no documentation of compliance (Level N in	Answer "A", "B", or C" o					
□ N.1 All Non-Glazed openings classified as Level A, B, C, or	,	on Glazad	Lononings ovist			
N.1 An Non-Glazed openings classified as Level A, B, C, of N.2 One or More Non-Glazed openings classified as Level D			* -			
table above		ni-Giazeu	openings classified as Level A in the			
N.3 One or More Non-Glazed openings is classified as Level						
[X] X. None or Some Glazed Openings One or more Glazed of	openings classified and Lev	el X in t	he table above.			
MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provid	~					
Qualified Inspector Name: John Felten	License Type: CBC		License or Certificate #: CBC1255984			
Inspection Company: Felten Professional Adjustment Te	am, LLC.	Phone:	866-568-7853			
Qualified Inspector – I hold an active license as a:	(check one)					
Home inspector licensed under Section 468.8314, Florida Statutes training approved by the Construction Industry Licensing Board a			er of hours of hurricane mitigation			
Building code inspector certified under Section 468.607, Florida Statutes. General, building or residential contractor licensed under Section 489.111, Florida Statutes.						
Professional engineer licensed under Section 471.015, Florida Statutes.						
Professional architect licensed under Section 481.213, Florida Statutes.						
Any other individual or entity recognized by the insurer as possessing the necessary qualifications to properly complete a uniform mitigation verification form pursuant to Section 627.711(2), Florida Statutes.						
experience to conduct a mitigation verification inspection. I, am a qualified inspector and I contractors and professional engineers only) I had my employ and I agree to be responsible for his/her work.						
Qualified Inspector Signature:Date	e: <u>5/20/2022</u>					
An individual or entity who knowingly or through gross neg is subject to investigation by the Florida Division of Insuran appropriate licensing agency or to criminal prosecution. (Se certifies this form shall be directly liable for the misconduct performed the inspection.	ce Fraud and may be sub ction 627.711(4)-(7), Flori	ject to a ida Statu	dministrative action by the ites) The Qualified Inspector who			
Homeowner to complete: I certify that the named Qualified residence identified on this form and that roof of identification						
Signature:	Date:					
An individual or entity who knowingly provides or utters a obtain or receive a discount on an insurance premium to w misdemeanor of the first degree. (Section 627.711(7), Florid	hich the individual or ent					
The definitions on this form are for inspection purposes only and cannot be hurricanes.	e used to certify any product or	constructio	on feature as offering protection from			

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

Inspectors Initials Property Address 200 Banana River Blvd S, Building 2400, Units 2401-2424, Cocoa Beach